

EP1000A Intercom Kit





KEY FEATURES

Door Station

- Self-adaptive IR supplement
- One-touch calling
- Pinhole camera with 720 x 576 @ 25 fps
- Unlock controlling

Indoor Station

- Hands-free video intercom communication
- Supports monitoring the door station and the external analog camera
- Remote unlocking
- Convenient installation and easy operation

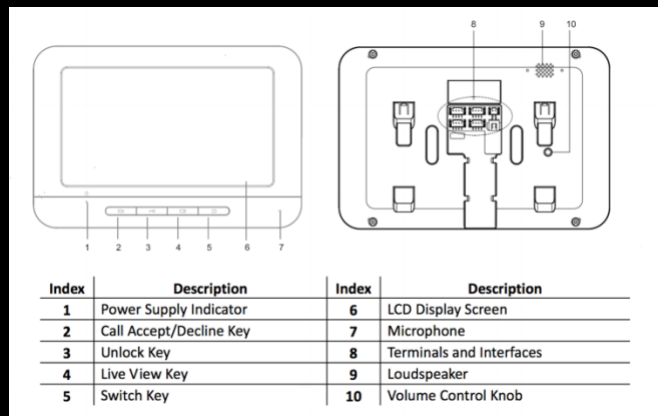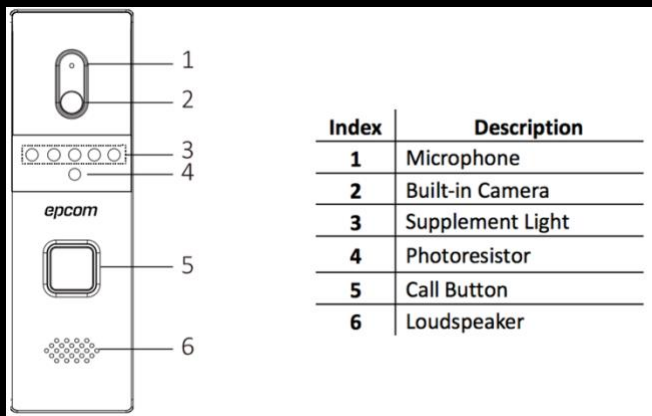

Camera Parameters	
Camera:	1/4" CMOS
Resolution:	720 × 576
Video frame rate:	25 fps
Audio Parameters	
Audio Input:	Built-in Omnidirectional Microphone
Audio Output:	Built-in Loudspeaker
Audio Quality:	Noise Suppression and Echo Cancellation
Light Supplement	
Light Supplement Mode:	Photosensitive IR Supplement, IR Range: 2 Meters
Device Interfaces	
I/O Output:	1 Relay Output
Four-wire Interface:	1 Four-Wire Interface (1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding)
General	
Working Temperature:	-30°C to 70°C (-22°F to 158°F)
Working Humidity:	10% to 90%

Monitor Parameters	
Display Screen:	7-Inch Colorful TFT LCD
Display Resolution:	800 × 480
Operation Method:	Physical Button
Audio Parameters	
Audio Input:	Built-in Omnidirectional Microphone
Audio Output:	Built-in Loudspeaker
Audio Quality:	Noise Suppression and Echo Cancellation
Device Interfaces	
Four-wire Interface:	4 Four-Wire Interfaces (1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding in 1 Four-Wire Interface)
General	
Power Supply:	12 VDC
Power Consumption:	≤5 W
Working Temperature:	-10° C to + 55° C (14° F to 131° F)
Working Humidity:	10% to 90%
Dimensions(L × W × H):	195.8 mm × 132.8 mm × 18.39 mm (7.7" × 5.2" ×0.7")

Typical Application

